



**BOSCH**  
Invented for life

# LBB 1992/00 Plena Voice Alarm Router



- ▶ Six-zone router with single or dual channel operation
- ▶ Six EMG input contacts
- ▶ Six business input contacts
- ▶ Six volume override output contacts
- ▶ Supervision within the Plena Voice Alarm System
- ▶ EN 54-16 and EN 60849 compliant

The Plena Voice Alarm Router is an expansion unit that can add six zones as well as 12 input and eight output contacts to the Voice Alarm System. It can use the built-in amplifier on the LBB 1990/00 Voice Alarm Controller, and provides inputs and outputs for one or two amplifiers in a multi-amplifier one or two-channel system.

It provides dual channel operation for calls and BGM simultaneously to a maximum of six different zones, using two Plena amplifiers. Additionally, single channel operation is possible with only one Plena amplifier.

Multiple routers can also share one amplifier, including the internal amplifier on the controller unit. It is possible to use any number of amplifiers from one up to the number of routers used. The controller supports A/B wiring.

## Functions

The LBB 1992/00 has a set of relays for zone-switching the power amplifier output(s) to different loudspeaker groups. Each zone can be switched between:

- The call channel (call-station selection, all-call microphone, or emergency activation)
- The BGM channel (front panel selection)
- Off

Volume override relay contacts are provided for each zone separately for overriding local loudspeaker volume controls. This ensures that priority messages go through with a given volume, even though the local volume controls may be set to a low volume level for background music, for example. Both three-wire and four-wire override schemes are supported. A call or a triggered input will activate these contacts for the appropriate zones, together with an additional voltage-free contact (call-active) for control purposes.

An overload protected 24 VDC output provides power for driving external relays, making an external power supply unnecessary. The master output channel, or one of the input channels, can be selected to be monitored with headphone connector and LED meter.

## Controls and indicators

### Front

- Meter (LED's for -20, -6, 0 dB and Power ON)
- Eight system fault LEDs
- 12 loudspeaker line fault LEDs
- Six EMG call-zone selection buttons
- 12 EMG call-zone status LEDs
- Six BMG zone selector buttons
- Six BMG zone status LEDs

### Back

- 2 x DIP switch
- Unit ID rotary control
- Mains voltage selector

- Power switch
- Mains socket

### Interconnections


#### Back

- 12 loudspeaker outputs
- Two external amp inputs
- Call output
- Six volume override outputs
- 12 trigger inputs
- RS-232 connector
- Two system interlinks
- Two external amp outputs (XLR/balanced)
- Power amp fault output
- 24 VDC power output
- 24 VDC power input
- Two extra trigger outputs
- Earth connection screw

### Certifications and Approvals

Region	Certification	
Europe	CE	TUV certificate IEC60849 Declaration of Conformity
Poland	CNBOP	
Safety		acc. to EN 60065
Immunity		acc. to EN 55103-2
Emission		acc. to EN 55103-1
Emergency		acc. to EN 54-16 / EN 60849

### Installation/Configuration Notes

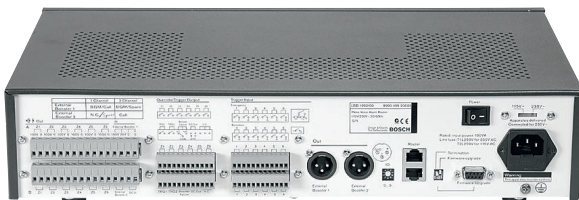

LBB 1992/00 rear view

### Parts Included

#### Quantity Component

1	LBB 1992/00 Plena Voice Alarm Router
1	Power cord
1	Set of 19" mounting brackets
1	Plena CD
1	Installation and User Instructions
1	XLR cable
1	Ethernet cable

### Technical Specifications

#### Electrical

##### Mains power supply

Voltage	230/115 VAC, $\pm 10\%$ , 50/60 Hz
Inrush current	1.5 A @ 230 VAC / 3 A @ 115 VAC
Max power consumption	50 VA
Idle / max load* current	0.2 A / 0.3 A

##### Battery power supply

Voltage	24 VDC, $\pm 15\%$ / $-15\%$
Current max	1.8 A
Typical / max load* current	0.51 A / 1.5 A

##### Trigger Inputs

Connectors	MC1,5 / 14-ST-3,5
Activation	Programmable
Supervision	On EMG inputs, programmable
Supervision method	Series / parallel resistor

##### 100 V input

Connector	MSTB 2,5 / 16-ST
Amp 1	100 V / 70 V / 0 V
Amp 2	100 V / 0 V
Power handling capacity	1000 W

##### Loudspeaker outputs

Connectors	MSTB 2,5 / 16-ST, floating
100 V output	700 W rated per zone
Volume override types	3-wire, 4-wire (24 V), 4-wire failsafe

##### Output Contacts

Connector	MC 1,5/14-ST-3,5
Rating	250 V, 7A, voltage free
General purpose relays (2x)	NO / COM

\* Maximum load means maximum load on 24 VDC, and indicator test.

**Mechanical**

Dimensions (H x W x D)	88 x 430 x 260 mm (19" wide, 2U high)
Weight	Approx. 3 kg
Mounting	Standalone, 19" rack
Color	Charcoal

**Environmental**

Operating temperature	-10 °C to +55 °C (14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

**Ordering Information**

<b>LBB 1992/00 Plena Voice Alarm Router</b> add six zones as well as 12 input and eight output contacts to the Voice Alarm System.	<b>LBB1992/00</b>
---	-------------------

**Accessories**

<b>PLN-VASLB-NL Plena VAS labels, Dutch (10 pcs)</b> Dutch, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-NL</b>
<b>PLN-VASLB-DE Plena VAS labels, German (10 pcs)</b> German, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-DE</b>
<b>PLN-VASLB-FR Plena VAS labels, French (10 pcs)</b> French, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-FR</b>
<b>PLN-VASLB-ES Plena VAS labels, Spanish (10 pcs)</b> Spanish, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-ES</b>
<b>PLN-VASLB-IT Plena VAS labels, Italian (10 pcs)</b> Italian, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-IT</b>
<b>PLN-VASLB-FI Plena VAS labels, Finnish (10 pcs)</b> Finnish, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-FI</b>
<b>PLN-VASLB-CZ Plena VAS labels, Czech (10 pcs)</b> Czech, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-CZ</b>
<b>PLN-VASLB-RU Plena VAS labels, Russian (10 pcs)</b> Russian, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-RU</b>
<b>PLN-VASLB-SE Plena VAS labels, Swedish (10 pcs)</b> Swedish, set of 10 pieces, and can be placed on the front panel	<b>PLN-VASLB-SE</b>

**Ordering Information****PLN-VASLB-DK Plena VAS labels, Danish (10 pcs)****PLN-VASLB-DK**

Danish, set of 10 pieces, and can be placed on the front panel

**PLN-VASLB-PL Plena VAS labels, Polish (10 pcs)****PLN-VASLB-PL**

Polish, set of 10 pieces, and can be placed on the front panel

**Americas:**  
Bosch Communications Systems  
12000 Portland Avenue South  
Burnsville, Minnesota 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2600  
Fax: +65 6571 2698  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**