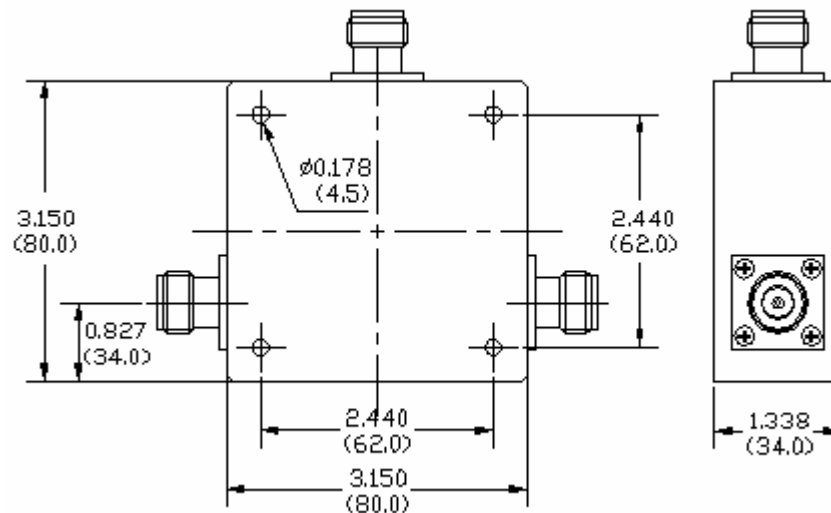


Key Features:

- Center frequency range: 150~400MHz with customer specified bandwidth
- Type-N female connectors
- Good magnetic filed shielding
- High power handling capability
- Weight ~1.2kg (2.6 lbs)

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	FWD CW Power, W	FWD Pulse Power, W	Temp. Range, °C
F2515-0182-08	175~190	0.4Max	20.0	1.20	400	2000	-10 ~ +60
F2515-0250-08	240~260	0.4Max	20.0	1.20	400	2000	-10 ~ +60
F2515-0250-16	230~270	0.4Max	18.0	1.30	400	2000	-10 ~ +60
F2515-0280-07	270~290	0.4Max	20.0	1.20	400	2000	-10 ~ +60
F2515-0295-10	280~310	0.4Max	20.0	1.20	400	2000	-10 ~ +60
F2515-0305-08	292~318	0.4Max	20.0	1.20	400	2000	-10 ~ +60
F2515-0380-08	365~395	0.4Max	20.0	1.20	400	2000	-10 ~ +60

Mechanical Structure:**Ordering Information:**

F2515-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency 0XXX MHz,