

Key Features:


- Frequency range: 800~2000MHz
- SMA connectorized configuration
- Small size, low cost
- Power handling >+50Watts forward
- Weight 4.9 oz (139 grams)
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2568-0088-18	800-960	0.5 Max	≥ 20	≤1.2	≥ 50	-30 ~ +65
F2568-0089-15	820-960	0.5 Max	≥ 20	≤1.2	≥ 50	-40 ~ +70
F2568-0109-24	960~1220	0.5 Max	≥ 20	≤1.2	≥ 50	-55 ~ +85
F2568-0123-25	1080~1380	0.6 Max	≥ 20	≤1.2	≥ 50	-40 ~ +70
F2568-0131-16	1200~1415	0.5 Max	≥ 20	≤1.2	≥ 50	-40 ~ +70
F2568-0160-31	1350~1850	0.5 Max	≥ 19	≤1.25	≥ 50	-40 ~ +70
F2568-0180-11	1700~1900	0.5 Max	≥ 20	≤1.2	≥ 50	-40 ~ +70

Mechanical Structure:

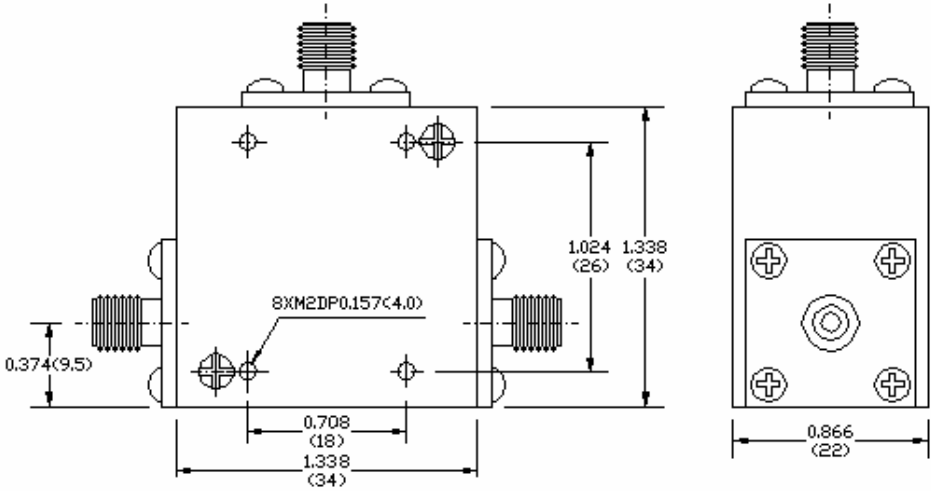

Note: All units are in inches.

Ordering Information:

