



RDL®

High Performance Audio Products. Made in America.

ACCESSORIES

Model D SERIES-RBTP

Remote Pair Button for RU-BTLA



- Remote Control of RU-BTLA Bluetooth® Audio Receiver
- Intuitive Single Button Pairing with LED Status Indication
- Decora®-Style Wall-Mounted Remote Control
- Mounts in Standard US Single-Gang Electrical Box
- Single-Button Operation for Pairing and Disconnecting
- Wired Using 3-Conductor Single-Pair Shielded or Twisted-Pair Cable
- Powered From the RU-BTLA
- LED Indicator for Pairing Status
- Two D SERIES-RBTPs Can Control One RU-BTLA
- Available in Standard RDL White, Stainless or Black

APPLICATION: The D SERIES-RBTP is a Decora-style wall-mounted pushbutton remote control for use with an RU-BTLA Bluetooth Audio Receiver. The D SERIES-RBTP provides convenient pairing control, status indication and disconnection of the associated RU-BTLA.

The front-panel push button is pressed and held until the blue LED flashes, indicating the RU-BTLA is available to pair. The front-panel LED indicator glows steadily once paired and dims 20 seconds later. A paired device may be manually disconnected by momentarily pressing the D SERIES-RBTP button.

The D SERIES-RBTP connects directly to the RU-BTLA using a 3-conductor single-pair shielded or a standard twisted-pair cable. One or Two D SERIES-RBTP pushbutton remotes may be used to control a single RU-BTLA. Each D SERIES-RBTP is powered from the RU-BTLA.

The low-profile Decora design blends seamlessly into commercial and residential environments, making it ideal for conference rooms, classrooms, hospitality spaces, and presentation systems that require user-friendly Bluetooth access.

The D-RBTP provides a simple and intuitive user interface for controlling RU-BTLA Bluetooth audio connections in professional installations. Designed to work with the RU-BTLA, this remote pushbutton allows users to initiate pairing and manage connections without accessing the equipment location while enabling the RU-BTLA to be placed in the most radio-advantageous location. Its Decora-style form factor ensures a clean, professional appearance, while its straightforward installation makes it a practical solution for system designers and installers.



RDL®




High Performance Audio Products. Made in America.

Installation/Operation

Model D SERIES-RBTP Remote Pair Button for RU-BTLA



Declaration of Conformity available from rdlnet.com.
Sole EMC specifications provided on product package.
Specifications are subject to change without notice.

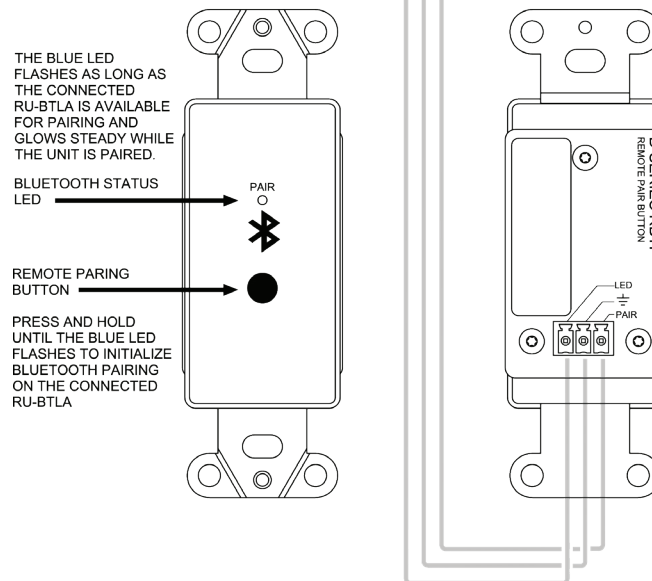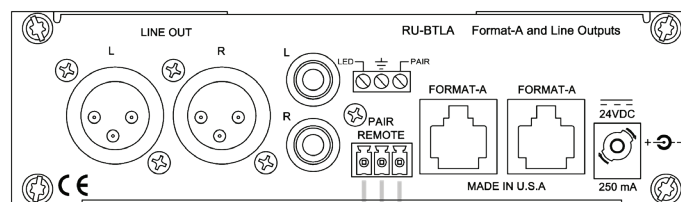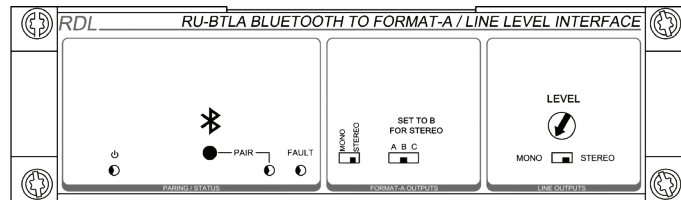

THE BLUE LED
FLASHES AS LONG AS
THE CONNECTED
RU-BTLA IS AVAILABLE
FOR PAIRING AND
GLOWS STEADY WHILE
THE UNIT IS PAIRED.

BLUETOOTH STATUS
LED

REMOTE PAIRING
BUTTON

PRESS AND HOLD
UNTIL THE BLUE LED
FLASHES TO INITIALIZE
BLUETOOTH PAIRING
ON THE CONNECTED
RU-BTLA

Safety Instructions/Consignes de sécurité/
Instrucciones de seguridad/Sicherheitshinweise:



EU Importer:
Importateur de l'UE:
Importador de la UE:
EU-Importeur:

RDL Europe B.V.
Joan Muyskenweg 124
1114 AN Amsterdam

TYPICAL PERFORMANCE

Pushbutton:	Momentary (press and release to disconnect; press and hold to initiate pairing)
Indicator:	Blue LED (off when disconnected; flashing when pairing; steady when paired)
Power Requirement:	Provided from RU-BTLA
Indicators (1):	Pair Status
Ambient Operating Environment:	0° C to 50° C
Dimensions:	Height: 4.1 in. (10.4 cm) Depth: 1.6 in. (4.10 cm) Width: 1.08 in. (2.74cm)
Package Type:	Cardboard Box
Package Dimensions:	4 x 4 x 2 in.
Shipping Weight:	0.11 lb
WEEE Weight:	0.16 lb